

GIANT VOICE® ATEX STROBE LIGHT

GV-EXST

High quality ATEX rated strobe light for hazardous areas warning





II 2 G EEx de IIC T6
Zone 1 + 2



The GV-EXST is ideal for visual warning in hazardous and high noise areas. It is designed for continuous use. The flash light is activated by switching on the supply voltage. The stable IP 67 casing may be installed indoors or outdoors. The Ex II-flash light consists of a small flame-proof aluminium casing with a glass hood made of hardened borosilicate glass to accommodate the electronic parts. The terminal box is designed for increased safety.

FEATURES

- Visual signal device with powerful xenon tube for use in explosion endangered areas of zones 1 and 2
- Typical applications in chemical/petrochemical industries, refineries, vessel/aircraft industries, ammunition depots, fork lifts etc.
- Sturdy aluminium housing, coated or powder coated
- Compact dimensions – also suitable for building in (only lens visible)
- Flameproof chamber „d“ – terminal connection chamber in protection class increased safety „e“
- For continuous operation
- Hardened glass lens (borosilicate glass), 15 J model with protecting cage made of stainless steel
- 4 lens colours

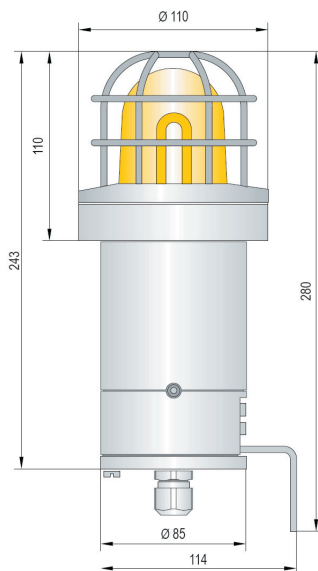

Housing, Colour	glassfibre reinforced polyester dark grey RAL 7024
Lens	polycarbonate (makrolon)
Lens colour	amber, red, blue, green (inner lens)
Terminal	1,5 mm ² fine wire 2,5 mm ² single wire
Cable entry	cable gland M20 x 1,5 and blind plug M20 x 1,5
Mounting	as required - swiveling mounting bracket
Strobe frequency/lifetime	~ 1 Hz, approx. 5 x 10 ⁶ flashes
Operation	continuous
Insulation class	II no equipotential bonding
Weight	5,9 kg
Approval	PTB 03 ATEX 1098

Ordering information: GV-EXSTROBE

Public Warning Products

HSS Engineering ApS
Bredskiftevej12
DK-8210
Aarhus, Denmark

Telephone : + 45 7022 8844
Telefax : + 45 7022 8866
URL : www.hss.dk
e-mail : hss@hss.dk